

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108588 A1

- (51) International Patent Classification⁷: **B81C 1/00**, **B81B 7/00**
- (21) International Application Number: **PCT/DK2003/000372**
- (22) International Filing Date: **6 June 2003 (06.06.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (71) Applicant (for all designated States except US): **DICON A/S [DK/DK]; Møgelgårdsvej 16, DK-8520 Lystrup (DK).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **RAVNKILDE, Jan, Tue [DK/DK]; Fyrrevang 84, Fløng, DK-2640 Hedehusene (DK). HENNINGSEN, Henning [DK/DK]; Nørregade 25, DK-8670 Låsby (DK).**
- (74) Agent: **PATENTGRUPPEN ApS; Arosgaarden, Aaboulewarden 31, DK-8000 Aarhus C (DK).**
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL MICROELECTROMECHANICAL STRUCTURE

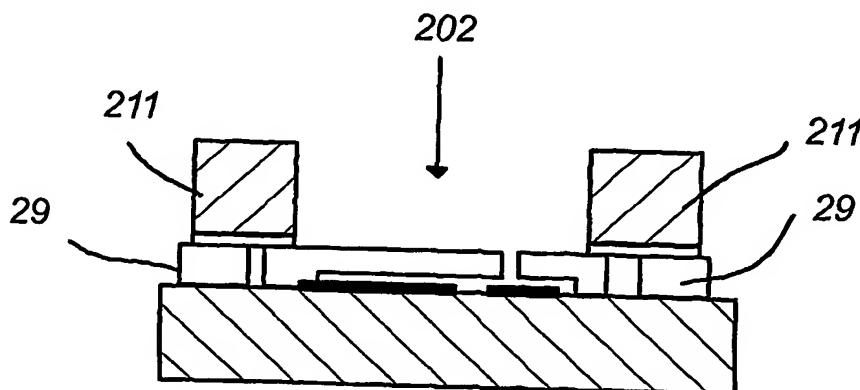

(57) Abstract: The invention relates to an optical microelectromechanical structure (MEMS) comprising - an (at least one) optically transmissive layer (UTL) - an (at least one) intermediate layer structure (IL) - a (at least one) device layer (DL) said intermediate layer structure (IL) defining one or more optical paths (OP) between said substantially optically transmissive layer (UTL) and said device layer (DL), said intermediate structure layer (IL) defining the distance (d) between said optically transmissive layer (UTL) and said device layer (DL).

WO 2004/108588 A1